


S100 Series Sight Glass

Application – Sight Glass; WP 3000 psig at -20° F to +73° F

- Use in applications where visual indication of liquid level is needed
- Provides visual indication on Level Controls or Safety Systems
- May be used with Pathway External Cage Models C300 and C303 and other applications using a 1½” or 2” NPT connection
- Use on production separators, heaters/treaters, scrubbers, liquid accumulators & other process vessels

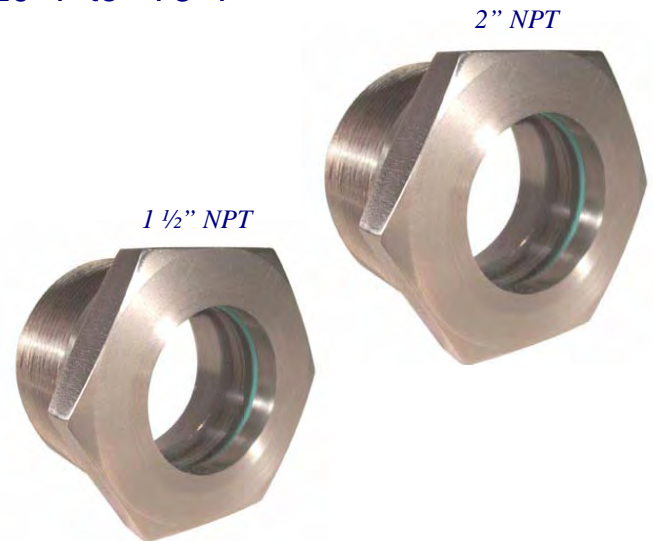

Features

- Durable body constructed of 303 SS or 316 SS
- Clear polycarbonate window
- Purchase separately or together with Pathway Pneumatic or Electric Level Controls and External Cages

Specifications

Working Pressure: Pressures up to 3000 psig from -20° F to +73° F, 2000 psig at -40° F, 2650 psig at +100° F, 2020 psig at +150° F, 1000 psig at +230° F max temp


Materials: 303 SS standard, 316 SS; polycarbonate lens

Connections: 1½” NPT, 2” NPT

Ordering Chart:

| | | |
|-------------------|-------------------------|---|
| S100: Sight Glass | → | |
| Body Style: | | |
| 0 | 1½” NPT Connection | → |
| 1 | 2” NPT | → |
| Body Type: | | |
| 1 | 303 SS standard | → |
| 2 | 316 SS | → |
| Lens Type: | | |
| 0 | Polycarbonate standard | → |
| Other: | | |
| 0 | No other options | → |
| 5 | Other special materials | → |

Example:

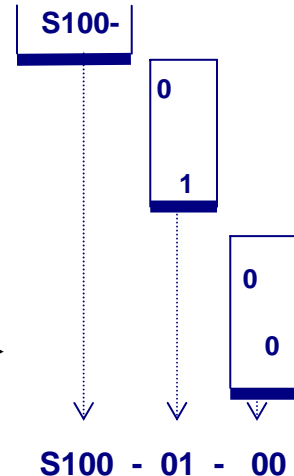

Example as Selected